

Furniture Set Option Choose Your Style.





Personal Passion Inspiration Creation Experience





Multiplicity Variability







Create Amazing Space & Experience







Valley Views Glamping, New Zealand







Creekside RNR, Canada







Palmera Camp Wadi Rum, Jordan







Let's Go Hydro, United Kingdom































TROPICAL DOME





Accessories



Solar Extractor Fan

The Solar Extractor Fan ventilation system offers a low-impact sustainable cooling system to extract warm air from top of dome.

Specifications

- Electric Current Type: DC / AC
- Adapter Type: Customizable by country
- N/W: 13.2KGS

Polycrystalline Solar Panel

- Power: 35W
- Size: 365x365x25mm
 Aluminum Fan Blade
- · Size: 14 inches

Door Kits

Specifications

- · Size: H2100 * W900m
- Frame: T6063-T5 aluminum frame Wood Plastic Casting Panels, 3 colors for Color Options: Grey / Oak / Black Walnut

Features

Come with picture window in the entranceway; Come with enclosure; Open Outward







Openable Round Glass Window

ø500mm

Openable Glass Window is fabricated with an aluminum alloy frame and tempered glass.

Come with the Bespoke

Anti-Mosquito Mesh,





Complete range of shells solution.

Inovative Solution

Experience from glamping business, unique dry-wet separation system.

Flexibility

Integrated design, easy and fast onsite Installation.

Simplicity Of Realization And Self-contained Lower cost of running the glamping site complex.

Times Optimization

Reduction of on-stie labors, cost effective.

Elimination In The Glamping in Dustry

In-depth understanding of the industry end-users, listening to the real needs of the market comprehensive and proactive coordination of the supply chain professional design and construction with complete qualifications.







Dome Structure

Material


Powder Coated steel frame

Features

Hardpressed, rustproof, elegant appearance

Max wind load 120km/h (74.5mph)

Max snow load 0.5kn/m² (5lkg/m²)



Cover Membrane

Density

850g/sqm fully opaque PVC fabric 950g/sqm transparent PVC fabric


Material

PVC coated polyester fabric

Features

Waterproof, UV resistant, fire retardant DIN4102, B1, M2 / NFPA701

Insulation layer



Curtain Kits (Liner & Rail)



Our exclusive dual-track design helps the curtain slide effortlessly.

- · Insulation layer for temperature control and creating interior style.
- · High-quality curtains for privacy.

















DM6 GLAMPING DOME

Diameter: 6m / 20ft

Floor area: 28m² / 300sq ft

Ridge height: 3.5m / 11ft

2m / 7ft

Panoramic bay window:

Assembly time:

3 - 4 hours

Recommended

room occupancy: 2-4

Bathroom

1

Bathroom + mezzanine

^

Bathroom + kitchen

en s

Bathroom + kitchen + mezzanine

X

Bathroom + kitchen

+ bedroom

×

Bathroom + kitchen

+ bedroom + mezzanine



DM7 GLAMPING DOME

Diameter:

7m / 23ft

Floor area:

38m2 / 410sq ft

Ridge height:

4m / 13ft

Panoramic bay

window:

2.3m / 7.5ft

Assembly time:

4 - 5 hours

Recommended

room occupancy: 2 - 4

Bathroom

1

Bathroom + mezzanine

. /

Bathroom + kitchen

~

Bathroom + kitchen

+ mezzanine

Bathroom + kitchen

+ bedroom

1

Bathroom + kitchen

+ bedroom + mezzanine



DM8 GLAMPING DOME

Diameter:

8m / 26ft

Floor area:

50m2 / 540sq ft

Ridge height:

4m / 13ft

Panoramic bay

window:

2.3m / 7.5ft

Assembly time:

4 - 5 hours

Recommended

room occupancy:

2 - 4

Bathroom

. 1

Bathroom + mezzanine

1

Bathroom + kitchen

Bathroom + kitchen + mezzanine

1

Bathroom + kitchen

+ bedroom

Bathroom + kitchen + bedroom + mezzanine ~



Glamping geodome tent offered with following accessories:

1. Framework

2. PVC membrane

3. Curtain kit

4. Insulation layer

5. Door

6. Cap vent

7. Solar fan

8. Openable round glass window 9. Stove jack 10. Triangle vent 11. Window 12. Magnetic screen door (optional)



Material:

Powder-coating steel frame

Features:

Hardpressed, rustproof, elegant appearance



The Solar Extractor Fan ventilation system offers a low-impact sustainable cooling system to extract warm air from top of dome.



Density:

850g/sqm fully opaque PVC fabric 950g/sqm transparent PVC fabric

Material:

PVC coated polyester fabric

Features:

Waterproof, UV resistant, fire retardant DIN4102, BI, M2 / NFPA701



ø500mm

Openable Glass Window is fabricated with an aluminum alloy frame and tempered glass. The position is customizable and the hole is factory cut.



Features:

100% Waterproof, rust-resistance

Dual-track design

Our exclusive dual-track design helps the curtain slide effortlessly.



For ø6 inch stove pipe

The stove jack hole position and size can be customized based upon your needs and factory cut, preserving the integrity of the steel frame, PVC outer shell and interior insulation fabric.



- · Radiation heat reflection coefficient: up to 85%;
- · Moisture-proof



Two-layer Roll-up Ventilation Window offers a roll-up strapable PVC fabric exterior and heavy duty fly screen interior.



- Size: H2100 * W900mm
- Frame: T6063-T5 aluminum frame
- · Panel: 5 + 9A +5mm insulating glass; one side frosted




The cap vent comes with a triangle PVC fabric cover or "hat" which allows both air circulation and rain protection.



Panoramic bay window is fixed, optional in skylight or 2 transparent round windows.



The high-density mosquito mesh Magnetic Screen Door keeps insects out of your dome. The screen automatically opens and closes offering hands-free entry and exit for both you and your pets.

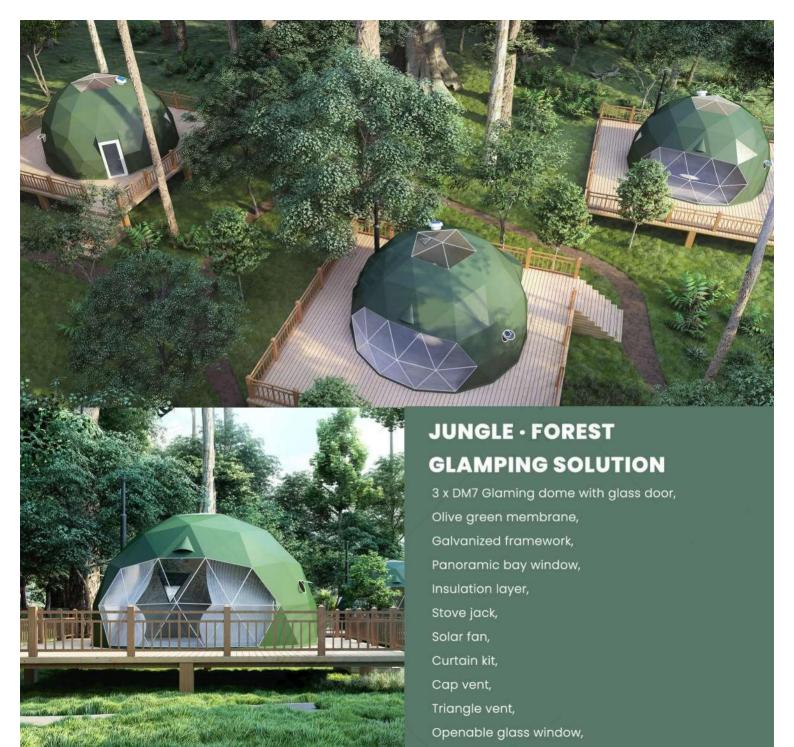

Skylight







Glamping



www.multicanchascubiertas.com info@multicanchascubiertas.com @mc_faber_chile